

## The Introduction of HaoMei Machinery Equipment Co., Ltd:

1. Haomei is recognized by the industry with high-quality services while providing high-quality products for customers.
2. The Company has a virtuous professional service team with skilled technologies, which is ready to provide high-quality services for users so as to meet the users' demands.
3. Facing market competition and social development, Haomei raises the service quality and level fully based on the starting point of "The Users' Benefit Takes The First Place", and has made service charters take "Life-long Follow-up Service" as core.




### The Technical Parameters of LB1000 Stationary Asphalt Mixing Plant:

Type	LB1000		
Production Capacity (t/h)	80		
The Weighing Accuracy (%)	Aggregate	$\pm 0.5\%$	
	Powder	$\pm 0.3\%$	
	Bitumen	$\pm 0.25\%$	

Mixer Rated Capacity	1000
Drying Drum (Dia×Length)	.55×6.5
Storage Bin Type	Side/Down type
The Volume Of Storage Bin(T)	80

## Settlement and Transport Plans

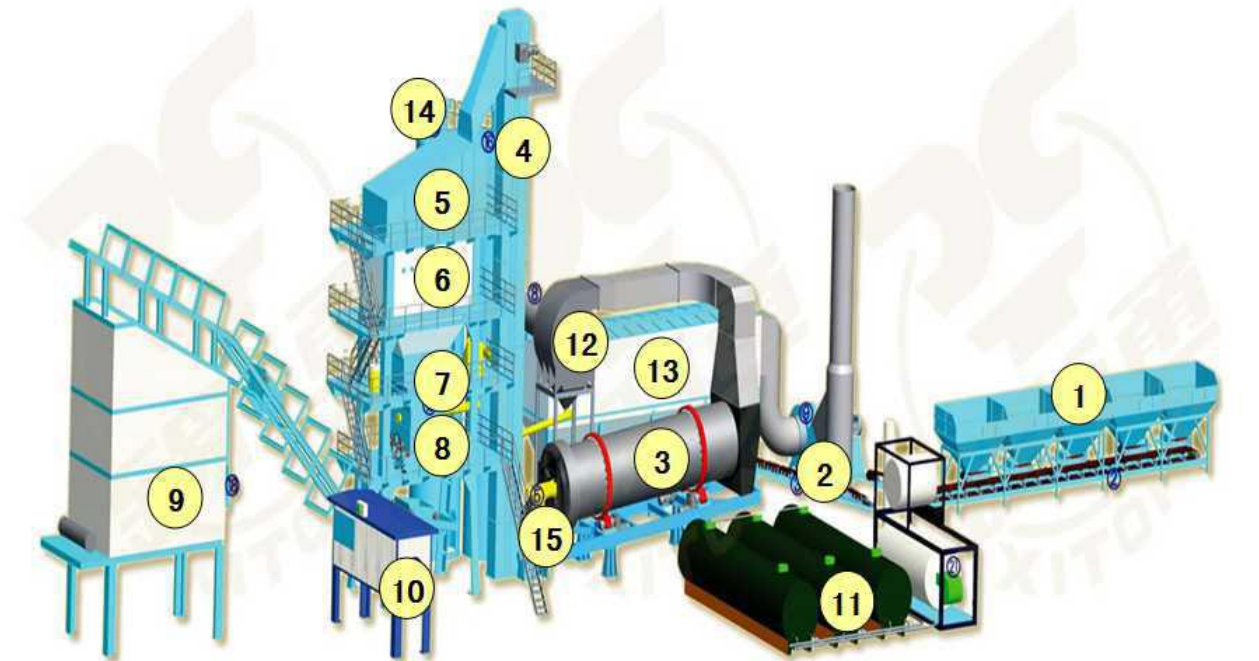

### 1. Consists of LB1000 Asphalt Mixing Plant:

1. Five aggregate hoppers and five belt feeders.
2. Aggregate belt conveyer.
3. Tilted belt feeding conveyor.
4. Middle filter

### 2. Characteristics of LB1000 Asphalt Mixing Plant:

- 1) Aggregate feeder adopts frequency conversion timing with credible capability; modularized design will be convenient for installation and conveyance.
- 2) The loading inlet of aggregate hopper covered with filter, the discharge port of aggregate hopper has adjustable loading door and material shortage alarm device. The two fine silo will alarm and automatic vibrating if material shortage.
- 3) The active roller and passive roller was equipped with prelubricated long-life bearings, tension device, and deviation prevented wheel which can adjust the tightness and deflection of belt conveyor; there is cleaning device inside and outside belt, in order to prevent the adhering aggregate to scuff belt.
- 4) There is emergency stop switch on belt conveyor;
- 5) Flow automatically structure middle filter can prevent the oversize aggregate entering the drying drum, reduce the heat loss, avoid jam in the hot aggregate elevator and the vibrating screen.

Contact us url : <https://www.concretebatchplant24.com> Email: [onlinehcx@gmail.com](mailto:onlinehcx@gmail.com)